



INLINE CHECK VALVE


BRASS OR STAINLESS BODY

SPRING OPERATED

2 PSI CRACKING PRESSURE

UP TO 6000 PSI

STAINLESS NACE MR-0157 COMPLIANT

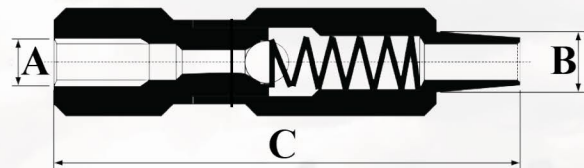

No	Part	Material	
		BCV-3000	SCV-6000
1	Body	Brass	316SS
3	O'ring	BUNA	BUNA
4	Check Ball	316SS	316SS
5	Spring	304SS	304SS

PART#	MATERIAL	NPT	WP (PSI)	A (INCH)	B	C
BCV-3000-1/8	BRASS	1/8"	3000	0.13	0.13	0.75
BCV-3000-1/4	BRASS	1/4"	3000	0.25	0.25	0.75
BCV-3000-1/2	BRASS	1/2"	3000	0.50	0.50	1.06
SCV-6000-1/8	STAINLESS	1/8"	6000	0.13	0.13	0.75
SCV-6000-1/4	STAINLESS	1/4"	6000	0.25	0.25	0.75
SCV-6000-1/2	STAINLESS	1/2"	6000	0.50	0.50	1.06