



B1 ADAPTERS

B1 TUBING HEAD ADAPTER · API 6A

KEY BENEFITS

- API 6A flange × threaded adapter
- 7-1/16" top flange · UPTBG bottom
- 2,000 – 15,000 psi



B1 TUBING HEAD ADAPTER


OVERVIEW

Apache B1 tubing head adapters provide a flanged-top by threaded-bottom transition built to API 6A. Offered with a 7-1/16" top flange rated 2,000 through 15,000 psi and UPTBG bottom threads from 2-3/8" to 3-1/2".

DIMENSIONAL DATA

TOP FLANGE	BOTTOM THREAD	A	B	WT (LB)
7-1/16" · 2000/3000 psi	2-3/8" UPTBG	6.61	15.00	142.00
7-1/16" · 2000/3000 psi	2-7/8" UPTBG	6.61	15.00	135.00
7-1/16" · 2000/3000 psi	3-1/2" UPTBG	6.61	15.00	145.00
7-1/16" · 5000 psi	2-3/8" UPTBG	6.84	15.50	210.00
7-1/16" · 5000 psi	2-7/8" UPTBG	6.84	15.50	195.00
7-1/16" · 5000 psi	3-1/2" UPTBG	6.84	15.50	175.00
7-1/16" · 10000 psi	2-3/8" UPTBG	7.09	18.90	302.50
7-1/16" · 10000 psi	2-7/8" UPTBG	7.09	18.90	302.50
7-1/16" · 15000 psi	2-3/8" UPTBG	—	—	420.00
7-1/16" · 15000 psi	2-7/8" UPTBG	—	—	420.00

Dimensions in inches; weights in lb. A = overall height · B = top-flange OD, per factory drawings (— = not published). Top flanged connection × bottom UPTBG threaded connection.

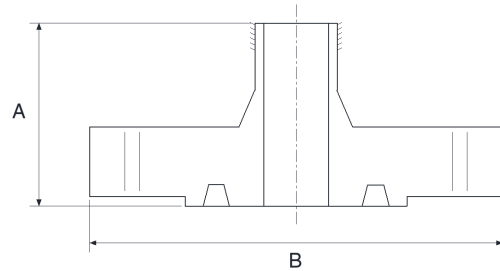

STANDARDS & OPTIONS

Specification	API 6A	Pressure Rating	2,000 / 3,000 / 5,000 / 10,000 / 15,000 psi
Type	Flange × threaded adapter	Bottom Thread	2-3/8" – 3-1/2" UPTBG
Top Flange	7-1/16"		

QUALITY. INTEGRITY. RELIABILITY.

Engineered solutions for demanding environments.

 www.apachemfg.com

GREATER HOUSTON

8809 Bailey Rd
Manvel, TX 77578
(713) 941-1669

ODESSA

2650 West Remington Rd
Odessa, TX 79763
(432) 385-7470