



BHT ADAPTERS

BOTTOM HOLE TEST ADAPTER / TREECAP · API 6A

KEY BENEFITS

- API 6A treecap / test adapter
- 5,000 – 10,000 psi
- EUE lift thread



BOTTOM HOLE TEST ADAPTER / TREECAP


OVERVIEW

Apache bottom hole test adapters (treecaps) allow a flexible means of entry into the tubing where an integral flanged unit is preferred – for pressure testing and tree work. Built to API 6A, 5,000 and 10,000 psi, with EUE lift threads.

DIMENSIONAL DATA

FLANGE SIZE	BORE	A	B	C	LIFT THREAD
2-1/16" · 5000 psi	2-1/16"	7.79"	8.46"	2.07"	2-3/8" EUE
2-9/16" · 5000 psi	2-9/16"	7.79"	9.65"	2.56"	2-7/8" EUE
2-1/16" · 10000 psi	2-1/16"	7.79"	7.88"	2.06"	2-3/8" EUE
2-9/16" · 10000 psi	2-9/16"	—	—	—	2-7/8" EUE

Dimensions in inches. A / B / C per cut sheet (— = contact for dimensions); lift thread is EUE.

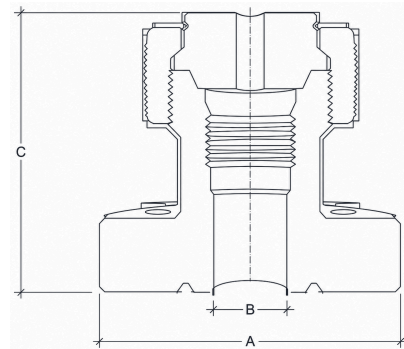

STANDARDS & OPTIONS

Specification	API 6A	Lift Thread	2-3/8" / 2-7/8" EUE
Pressure Rating	5,000 / 10,000 psi	Use	Tubing entry, pressure testing, tree work
Bore	2-1/16" – 2-9/16"		

QUALITY. INTEGRITY. RELIABILITY.

Engineered solutions for demanding environments.

 www.apachemfg.com

GREATER HOUSTON

8809 Bailey Rd
Manvel, TX 77578
(713) 941-1669

ODESSA

2650 West Remington Rd
Odessa, TX 79763
(432) 385-7470