



CASING HEADS

C-22 CASING HEAD · API 6A

KEY BENEFITS

- API 6A · 2,000 / 3,000 / 5,000 psi
- C-22 straight-bore bowl · 45° load shoulders
- Line-pipe & side-studded outlets



C-22 CASING HEAD


OVERVIEW

Apache casing heads feature a C-22 straight-bore bowl with 45° load shoulders that protect the sealing area from drilling-tool damage and eliminate bowl-protector wedging under pressure. Built to API 6A with line-pipe and side-studded outlets, rated 2,000 / 3,000 / 5,000 psi.

DIMENSIONAL DATA

CASING SIZE	TOP FLANGE	A	B	C
8-5/8"	11"	17.25-17.50	8.00	10.88
9-5/8"	11"	17.25-17.50	9.00	10.88
10-3/4"	11"	17.25-17.50	10.00	10.88
11-3/4"	13-5/8"	17.50	12.56	13.50
13-3/8"	13-5/8"	17.50	12.56	13.50

Dimensions in inches. A shown across the 2,000-5,000 psi ratings; weights run 300-780 lb by size and rating. C-22 profile with 45° load shoulders. A / B / C per the reference drawing.

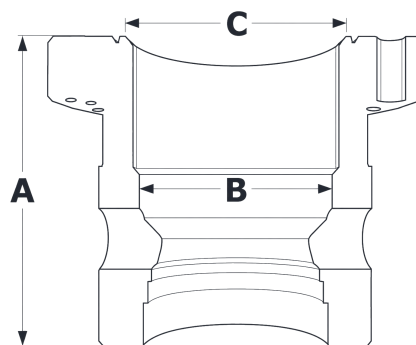

STANDARDS & OPTIONS

Specification	API 6A	Outlets	Line-pipe and side-studded
Working Pressure	2,000 / 3,000 / 5,000 psi	Top Flanges	11" and 13-5/8"
Bowl Profile	C-22 straight bore, 45° load shoulders	Accepts	C-22 casing hangers / secondary seals

QUALITY. INTEGRITY. RELIABILITY.

Engineered solutions for demanding environments.

 www.apachemfg.com

GREATER HOUSTON

8809 Bailey Rd
Manvel, TX 77578
(713) 941-1669

ODESSA

2650 West Remington Rd
Odessa, TX 79763
(432) 385-7470