



FIG 100 SERIES

1000 PSI ECONOMICAL HAMMER UNION

KEY BENEFITS

- 1,000 PSI NSCWP · WOG service up to 1,000 PSI
- Economical low-pressure union · metal-seat sealing
- NPT threaded connections · 2" through 8"



1000 PSI NSCWP ECONOMICAL HAMMER UNION


OVERVIEW

The Apache FIG 100 is an economical hammer union for low-pressure service, rated 1,000 PSI non-shock cold working pressure for water, oil, and gas. A metal-seat (metal-to-metal) seal and NPT threaded male and female subs make up quickly with a hammer-tight wing nut, in sizes 2" through 8".

DIMENSIONAL DATA

PART #	NPT	A (IN)	B (IN)	M SUB	F SUB	NUT	WT (LB)
A100T-2.0	2"	2.94	3.66	A105	A105	A105	5.60
A100T-3.0	3"	4.07	4.92	A105	A105	A105	14.00
A100T-4.0	4"	4.55	4.92	A105	A105	A105	23.00
A100T-6.0	6"	6.57	7.48	A105	A105	A105	48.00
A100T-8.0	8"	8.50	8.72	A105	A105	A105	59.00

Dimensions in inches; weights in lb. A and B per the dimensional drawing. All components — male sub, female sub, and wing nut — are ASTM A105 forged steel in every size. NSCWP 1,000 PSI · test pressure 1,500 PSI. Metal-seat sealing.

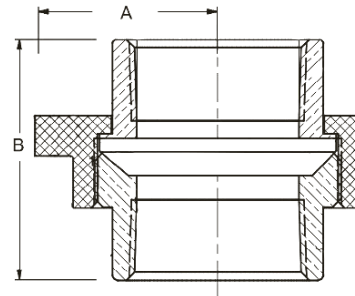

STANDARDS & OPTIONS

Pressure Rating	1,000 PSI NSCWP · WOG up to 1,000 PSI
Test Pressure	1,500 PSI
Design	Economical low-pressure union
Sealing	Metal seat (metal-to-metal)
End Connections	NPT threaded
Sizes	2", 3", 4", 6", 8"
Service	Standard service — not suitable for sour gas

MATERIALS / CONSTRUCTION

#	COMPONENT	MATERIAL
1	Male Sub	ASTM A105 forged steel
2	Female Sub	ASTM A105 forged steel
3	Wing Nut	ASTM A105 forged steel
4	Seal	Metal seat (metal-to-metal)

PRODUCT WARNINGS

Pressure-containing piping components are dangerous if used incorrectly. Observe all industry safety standards and common sense when working around any pressure-containing equipment. Failure to do so can result in serious bodily injury or death.

- **DO NOT** exceed the recommended working pressure rating.
- **DO NOT** mix and match components of different pressure ratings. Mismatched unions can fail explosively, resulting in property damage, injury, or death.
- **DO NOT** strike a hammer union that is under pressure.
- **DO NOT** use a union that is worn, damaged, or deteriorated in any way.
- **DO NOT** mix standard and sour-gas service products. Standard service equipment is not suitable for sour applications.
- **DO NOT** use Apache products in overhead suspension applications.
- Make sure the piping system is depressurized when disassembling union connections.
- Properly identify the figure number and pressure rating when selecting a union for service.
- Take extra care when working in ambient temperatures below freezing. Low temperature reduces the ductility and impact strength of iron and steel.
- Wear appropriate protective equipment when installing and disassembling Apache products.
- Remove leaking components immediately.
- Remove from service and dispose of any equipment where positive identification of the product's size, figure, and pressure rating is not possible due to deterioration or other damage.

QUALITY. INTEGRITY. RELIABILITY.

Engineered solutions for demanding environments.

 www.apachemfg.com

GREATER HOUSTON

8809 Bailey Rd
Manvel, TX 77578
(713) 941-1669

ODESSA

2650 West Remington Rd
Odessa, TX 79763
(432) 385-7470