



INTERMEDIATE SPOOLS

C-22 CASING SPOOL · API 6A

KEY BENEFITS

- API 6A construction
- C-22 straight-bore bowl · 45° load shoulders
- BG bottom prep



INTERMEDIATE / C-22 CASING SPOOL


OVERVIEW

Apache intermediate (C-22) casing spools share the C-22 straight-bore bowl with 45° load shoulders. Built to API 6A with a BG bottom preparation and CIW or ET-style pins available.

DIMENSIONAL DATA

BOTTOM FLANGE	BOTTOM WP	TOP FLANGE	TOP WP	A	B	C	WT (LB)
11"	3,000	11"	3,000	23.12	10.00	10.88	710
11"	3,000	11"	5,000	26.25	10.00	10.88	—
11"	5,000	11"	5,000	26.25	10.00	10.88	—
11"	5,000	11"	10,000	31.25	10.00	10.88	—
13-5/8"	3,000	11"	3,000	26.25	10.00	10.88	785
13-5/8"	3,000	11"	5,000	26.25	10.00	10.88	1175
13-5/8"	3,000	13-5/8"	3,000	26.75	12.50	13.50	—
13-5/8"	3,000	13-5/8"	5,000	26.75	12.50	13.50	—
13-5/8"	5,000	11"	5,000	29.38	10.00	10.88	1595
13-5/8"	5,000	11"	10,000	30.25	10.00	10.88	1948
13-5/8"	5,000	13-5/8"	5,000	30.25	12.50	13.50	—
13-5/8"	5,000	13-5/8"	10,000	30.25	12.50	13.50	—
13-5/8"	10,000	11"	10,000	30.88	10.00	10.88	2950
13-5/8"	10,000	13-5/8"	10,000	32.62	12.50	13.50	3900
16-3/4"	3,000	11"	3,000	23.12	10.00	10.88	1200
16-3/4"	3,000	11"	5,000	24.12	10.00	10.88	1518
16-3/4"	3,000	13-5/8"	3,000	24.12	12.50	13.50	1725
16-3/4"	3,000	13-5/8"	5,000	25.00	12.50	13.50	1950
16-3/4"	5,000	11"	5,000	30.50	10.00	10.88	—
16-3/4"	5,000	11"	10,000	29.75	10.00	10.88	3235
16-3/4"	5,000	13-5/8"	5,000	29.75	12.50	13.50	—
16-3/4"	5,000	13-5/8"	10,000	30.50	12.50	13.50	3243
16-3/4"	10,000	13-5/8"	10,000	32.62	12.50	13.50	—
16-3/4"	10,000	16-3/4"	10,000	33.00	15.37	16.62	—
20-3/4"	3,000	13-5/8"	3,000	25.25	12.50	13.50	1960
20-3/4"	3,000	13-5/8"	5,000	27.00	12.50	13.50	2450
20-3/4"	3,000	20-3/4"	3,000	27.00	19.12	20.12	—
20-3/4"	3,000	21-1/4"	5,000	29.25	19.12	20.12	—
21-1/4"	5,000	13-5/8"	5,000	27.00	12.50	13.50	—
21-1/4"	5,000	13-5/8"	10,000	29.25	12.50	13.50	—
21-1/4"	5,000	16-3/4"	5,000	30.75	15.37	16.62	—
21-1/4"	5,000	16-3/4"	10,000	32.25	15.37	16.62	—

WP = flange working pressure in psi; dimensions in inches; weights in lb. A / B / C per the reference drawing (— = weight not published).

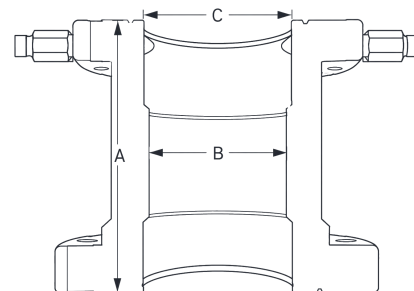

STANDARDS & OPTIONS

Specification	API 6A	Pins	CIW or ET style
Bowl Profile	C-22 straight bore, 45° load shoulders	Outlets	Line-pipe and side-studded
Bottom Prep	BG bottom		

QUALITY. INTEGRITY. RELIABILITY.

Engineered solutions for demanding environments.

 www.apachemfg.com

GREATER HOUSTON

8809 Bailey Rd
Manvel, TX 77578
(713) 941-1669

ODESSA

2650 West Remington Rd
Odessa, TX 79763
(432) 385-7470