



TCM HEADS

TCM THREADED TUBING HEAD

KEY BENEFITS

- TCM top × threaded or SOW bottom
- 4 BP lock-down pins · 2" LP outlets
- Rated up to 5,000 psi



TCM THREADED TUBING HEAD


OVERVIEW

Apache TCM threaded tubing heads feature a TCM top by threaded or SOW bottom connection. Every head is supplied with four BP lock-down pins and 2" LP outlets, rated up to 5,000 psi for wellhead and production service.

DIMENSIONAL DATA

FLANGE	PRESSURE	BOTTOM	OUTLET	A	B	C	WT (LB)
7-1/16"	3,000	4-1/2" 8rd	2 × 2" LP	14.000	7.000	7.126	103
7-1/16"	3,000	5-1/2" 8rd	2 × 2" LP	14.000	7.000	7.126	101
7-1/16"	5,000	4-1/2" 8rd	2 × 2" LP	15.945	7.000	7.126	108
7-1/16"	5,000	5-1/2" 8rd	2 × 2" LP	15.945	7.000	7.126	104

Flange working pressure in psi; dimensions in inches; weights in lb. 8rd = 8-round casing thread. A / B / C per the reference drawing. Lock pins sold separately.

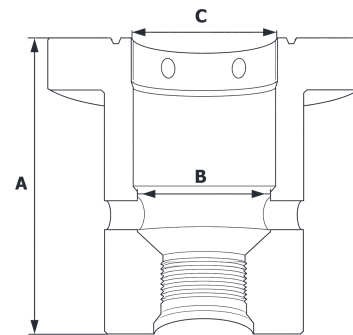

STANDARDS & OPTIONS

Type	Threaded tubing head	Lock-Down	4 × BP lock pins
Top Connection	TCM	Outlets	2" LP
Bottom Connection	Threaded or SOW bottom	Pressure Rating	Up to 5,000 psi

QUALITY. INTEGRITY. RELIABILITY.

Engineered solutions for demanding environments.

 www.apachemfg.com

GREATER HOUSTON

8809 Bailey Rd
Manvel, TX 77578
(713) 941-1669

ODESSA

2650 West Remington Rd
Odessa, TX 79763
(432) 385-7470