

DIBV SERIES

THREADED BALL VALVE

KEY BENEFITS

- Color coded up to 2000 WOG
- Blow-out proof stem for safety
- NACE MR-0175 compliant




TWO-PIECE DUCTILE IRON OILFIELD BALL VALVE


OVERVIEW

The Apache DIBV Series is a two-piece ductile iron oilfield ball valve for demanding service. This series features ductile iron body construction, floating ball design, color-coded pressure ratings up to 2000 WOG, blow-out proof stem, locking plate, grease fitting, and NACE MR-0175 compliance.

DIMENSIONAL DATA

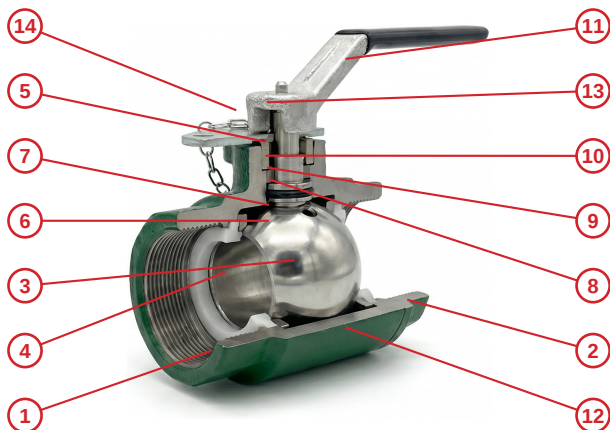

SKU	NPT	Color	WP	B	H	G
DIBV15FT-1	1" FP	BLUE	1500	4.00	3.06	6.25
DIBV20FT-1	1" FP	GREEN	2000	4.00	3.06	6.25
DIBV10RT-2	2" RP	MAROON	1000	5.50	5.63	8.50
DIBV15RT-2	2" RP	BLUE	1500	5.50	5.63	8.50
DIBV20RT-2	2" RP	GREEN	2000	5.50	5.63	8.50
DIBV20FT-2	2" FP	GREEN	2000	6.00	6.00	8.50
DIBV10RT-3	3" RP	MAROON	1000	6.00	5.88	8.50
DIBV20RT-3	3" RP	GREEN	2000	6.00	5.88	8.50
DIBV20FT-3	3" FP	GREEN	2000	8.75	6.78	15.00
DIBV10RT-4	4" RP	MAROON	1000	8.75	6.78	15.00
DIBV20RT-4	4" RP	GREEN	2000	8.75	6.78	15.00

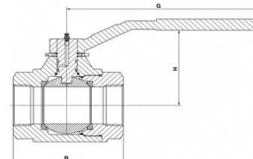

MATERIALS / CONSTRUCTION

#	COMPONENT	MATERIAL / SPECIFICATION
1	Body	A395
2	Bonnet	A395
3	Ball	304SS
4	Seat	DELTRIN
5	Stem	304SS
6	Stem Washer	TEFLON
7	Stem O-ring	VITON
8	Thrust Bearing	TEFLON
9	Stop Collar	A194 2H
10	Snap Ring	6150
11	Handle	A395
12	Body Seal	VITON
13	Handle Bolt	A193 B7
14	Stop Screw	A193 B7

STANDARDS & OPTIONS

Pressure Rating	Color coded, up to 2000 WOG
Body	Ductile iron body
Port	Full port and reduced port models
Valve Style	Two-piece oilfield ball valve
Ball	Floating ball
Stem	Blow-out proof stem
Handle	Locking plate
Feature	Grease fitting
Threads	ANSI B1.20.1, BS21, DIN 259/2999
Compliance	NACE MR-0175 compliant

QUALITY. INTEGRITY. RELIABILITY.

Engineered solutions for demanding environments.

www.apachemfg.com

GREATER HOUSTON

8809 Bailey Rd
Manvel, TX 77578
(713) 941-1669

ODESSA

2650 West Remington Rd
Odessa, TX 79763
(432) 385-7470